


SAE J514

Ref. Aeroquip 206801
 Ref. Parker A0EG
 Ref. Weatherhead C3459



6805


ORB Female Elbow
Male O-Ring Boss x Female Pipe

6805-①-② ①-MB ②-FP	① Male ORB	② Female NPTF	C Nut Hex	M Length	N Length	Y Flats	Operating Pressure
6805-04-02-4	7/16 - 20	1/8 - 27	9/16	1.09	0.66	9/16	5,000
6805-04-04-4	7/16 - 20	1/4 - 18	9/16	1.17	0.88	3/4	5,000
6805-05-02	1/2 - 20	1/8 - 27	5/8	1.16	0.66	5/8	5,000
6805-06-04-4	9/16 - 18	1/4 - 18	11/16	1.34	0.63	3/4	5,000
6805-06-06-4	9/16 - 18	3/8 - 18	11/16	1.31	0.71	7/8	4,500
6805-08-06-4	3/4 - 16	3/8 - 18	7/8	1.50	1.03	7/8	4,500
6805-08-08-4	3/4 - 16	1/2 - 14	7/8	1.56	1.23	1 1/16	3,000
6805-10-08-4	7/8 - 14	1/2 - 14	1"	1.81	1.20	1 1/16	3,000
6805-12-08	1 1/16 - 12	1/2 - 14	1 1/4	1.94	1.23	1 1/8	3,000
6805-12-12-4	1 1/16 - 12	3/4 - 14	1 1/4	2.00	0.81	1 5/16	3,000
6805-14-12-4	1 3/16 - 12	3/4 - 14	1 3/8	2.06	1.42	1 5/16	3,000
6805-16-16-4	1 5/16 - 12	1 - 11 1/2	1 1/2	2.25	1.62	1 5/8	1,800
6805-20-20-4	1 5/8 - 12	1 1/4 - 11 1/2	1 7/8	2.38	1.70	1 7/8	1,500
6805-32-32-4	2 1/2 - 12	2 - 11 1/2	2 3/4	3.00	2.38	2 13/16	1,200

4:1 Safety Factor

SAE J514

Ref. Aeroquip 206804
 Ref. Parker A0E4G
 Ref. Weatherhead C3469

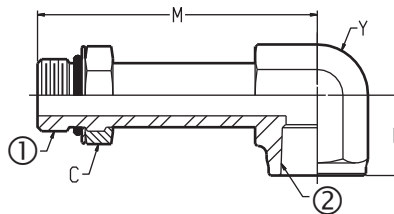

6805LL

ORB Female Elbow
Double Long

U-Ring Boss Fittings

6805LL-①-② ①-MB ②-FP	① Male ORB	② Female NPTF	C Nut Hex	M Length	N Length	Y Flats	Operating Pressure
6805LL-08-06-4	3/4 - 16	3/8 - 18	7/8	2.92	0.66	7/8	4,500
6805LL-10-08-4	7/8 - 14	1/2 - 14	1"	3.56	0.99	1 1/16	3,000
6805LL-12-12-4	1 1/16 - 12	3/4 - 14	1 1/4	4.13	1.35	1 5/16	3,000
6805LL-16-16-4	1 5/16 - 12	1 - 11 1/2	1 1/2	4.63	1.62	1 5/8	1,800

4:1 Safety Factor